

# EB-SERIES ELECTRIC & HYDRAULIC BAR CUTTERS

## Spec Sheet

### Enerpac Introduces NEW Electric & Hydraulic Bar Cutters

The Bar Cutters are your fast, safe, and simple solution for cutting metal bar. The Electric Bar Cutters' compact size and low weight enable them to be easily transported and used wherever an external power source is available. The Hydraulic Bar Cutters are ideal for use in production or manufacturing facilities with demanding, high-volume cutting applications.




#### PRODUCTIVITY

- Broad range of hydraulic and electric tools quickly and easily cut through heavy-duty bar
- Highly durable, long-lasting blades outlast angle grinder or saw blades

#### SAFETY

- Controlled cutting process enhances user safety compared with use of cut-off blades
- Minimal spark risk compared to torching, grinding and sawing methods
- Cutters produce minimal vibration, helping prevent HAVS (Hand Arm Vibration Syndrome)

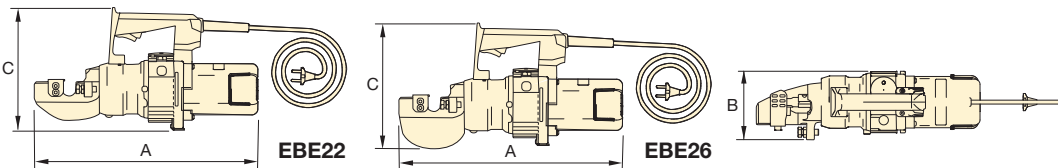


Maximum Material Diameter* (in)	Power Specifications				Model Number	Maximum Material Tensile Strength* (psi)	Maximum Material Hardness* (HRc)	Maximum Cutting Force (tons)	Dimensions (in)			Cord Length (ft)	Wt. (lbs)	Replacement Blade Kit Number
	Volts	Hz	Amps	Watts					A	B	C			
0.87	120	60	11	1300	EBE22B	94,275	43	25.1	18.1	5.5	9.8	6	29	EBE2201K
0.87	230	50	6.8	1400	EBE22E	94,275	43	25.1	18.1	5.5	9.8	10	29	EBE2201K
1.02	120	60	11	1300	EBE26B	94,275	43	37	18.4	5.5	10.2	6	35	EBE2601K
1.02	230	50	6.8	1400	EBE26E	94,275	43	37	18.4	5.5	10.2	10	35	EBE2601K

**Voltage: (Model No. ending with suffix)**

- B = 120V, 60 Hz (with American-style NEMA 6-15 plug)
- E = 230V, 50 Hz (with European-style SCHUKO plug)

\* Maximum material properties indicated refer to the material to be cut.

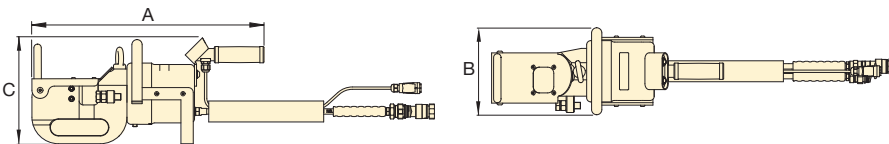

Maximum Material Diameter (in)	Model Number	Maximum Material Tensile Strength* (psi)	Maximum Material Hardness* (HRc)	Maximum Cutting Force (tons)	Maximum Hydraulic Operating Pressure (psi)	Dimensions (in)			Wt. (lbs)	Replacement Blade Kit Number
						A	B	C		
1.18	EBH30	87,000	43	50	10,000	18.9	7.2	8.7	46	EBH3001K
1.38	EBH35	89,900	43	68	10,000	22.3	8.4	10.2	106	EBH3501K
2.04	EBH52	72,500	43	121	10,000	30.1	10.39	12.2	299	EBH5201K

\* Maximum material properties indicated refer to the material to be cut.

Pump Model Number* (with electric pump valve)	Motor Electrical Specification	Motor Size (hp)	Wt. (lbs)	Required Twin Hose Model No.** (sold separately)
ZE6410XG-S	208-240 V-3 ph	7.5	185	CH720EC
ZE6410XJ-S	460-480 V-3 ph			
ZE6410XK-S	440 V-3 ph			
ZE6410XW-S	380-415 V-3 ph			

\* To add a roll cage to the pump, add an "R" prior to the "S" in the nomenclature, e.g. ZE6410XG-RS.

\*\* Tool, pump, and hose are all sold separately, and all are required for the system to function."

03-070144918\_11