

EDCH-SERIES HYDRAULIC DECOMMISSIONING CUTTERS

Spec Sheet



Enerpac introduces NEW Decommissioning Cutters

The versatile new Decommissioning Cutters combine speed and power needed to make short work of recycling or general demolition applications.

PRODUCTIVITY


- Powerful jaws and an exceptionally large blade aperture enable use on a large variety of applications including metal tubes, cables, profiles and similar materials

SAFETY

- Minimal spark risk compared to torching, grinding and sawing methods
- Cutters produce minimal vibration, helping prevent HAVS (Hand Arm Vibration Syndrome)



- Durable blades maintain efficiency throughout rigorous use
- Double-acting steel piston and cylinder improve robustness and control
- Control knob immediately stops the tool when released, improving operator safety
- External hydraulic pump helps keep tool cooler and working longer (pump, hose, and pump coupler sold separately)

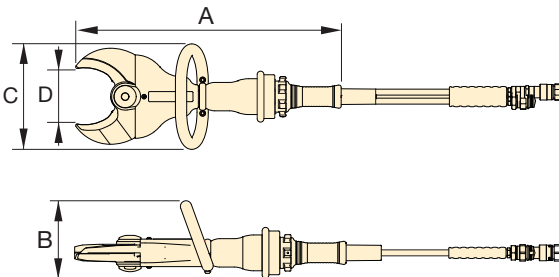

Maximum Blade Aperture (in)	Model Number*	Maximum Material Tensile Strength* (psi)	Maximum Material Hardness* (HRc)	Maximum Hydraulic Operating Pressure (psi)	Dimensions (in)				Wt. (lbs)
					A	B	C	D	
5.12	EDCH130	94,275	41	10,000	23.2	6.7	9.2	5.1	25.4
5.70	EDCH145	94,275	41	10,000	27.0	8.1	9.7	5.7	37.3
6.69	EDCH170	94,275	41	10,000	28.9	6.8	9.8	6.7	53.4

* Maximum material properties indicated refer to the material to be cut.

Pump Model Number* (manual pump valve type)	Motor Electrical Specification	Motor Size (hp)	Weight (lbs)	Required Twin Hose Model No.** (sold separately)
ZE6210XG-S	208-240 V-3 ph	7.5	170	CH720MC
ZE6210XJ-S	460-480 V-3 ph			
ZE6210XK-S	440 V-3 ph			
ZE6210XW-S	380-415 V-3 ph			

* To add a roll cage to the pump, add an "R" prior to the "S" in the nomenclature, e.g. ZE6210XG-RS.

** Tool, pump, and hose are all sold separately, and all are required for the system to function."

03-070144918_11