

EWC-SERIES ELECTRIC & HYDRAULIC WIRE & CABLE CUTTERS

Spec Sheet

Enerpac introduces NEW Electric & Hydraulic Wire and Cable Cutters

The EWC-Series Wire and Cable Cutters quickly and safely cut through heavy-duty wire rope and cables. The self-contained Electric Cutters offer power and control in a portable package. The Hydraulic Cutters are driven by an external pump and offer even greater power and durability to use in high-volume applications.


KEY FEATURES:

PRODUCTIVITY

- A broad range of hydraulic and electric tools quickly and easily cut through cable and wire rope

SAFETY

- Controlled cutting process enhances operator safety
- Minimal spark risk compared with torching, grinding and sawing methods
- Cutters produce minimal vibration, helping prevent HAVS (Hand Arm Vibration Syndrome)

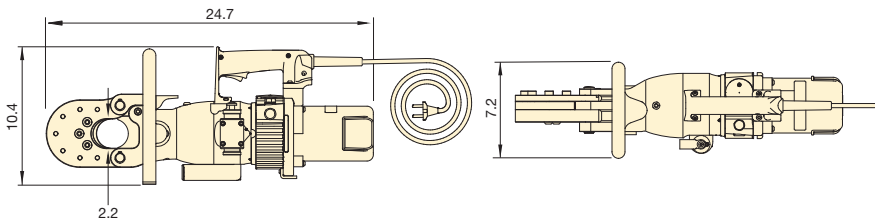


Max. Material Diameter* (in)		Power Specifications				Model Number	Maximum Material Hardness* (HRc)	Maximum Cutting Force (tons)	Cord Length (ft)	Wt. (lbs)	Replacement Blade Kit Number
Cable	Rope	Volts	Hz	Amps	Watts						
2.17	1.65	120	60	11	1300	EWCE55B	48	38.2	6	55	EWCE5501K
2.17	1.65	230	50	6.8	1400	EWCE55E	48	38.2	10	55	EWCE5501K

Voltage: (Model No. ending with suffix)


B = 120V, 60 Hz (with American-style NEMA 6-15 plug)

E = 230V, 50 Hz (with European-style SCHUKO plug)


EWCH90

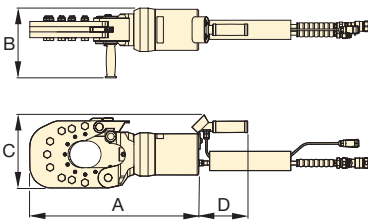

EWCH140



EWCH180

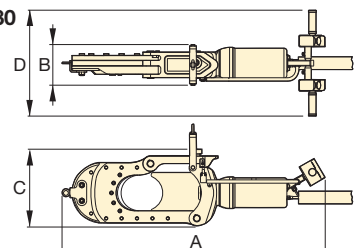

Maximum Material Diameter* (in)	Model Number**	Maximum Material Tensile Strength* (psi)	Maximum Material Hardness* (HRc)	Maximum Cutting Force (tons)	Maximum Hydraulic Operating Pressure (psi)	Dimensions (in)				Wt. (lbs)	Replacement Blade Kit Number
						A	B	C	D		
3.54	EWCH90	94,275	43	61.8	10,000	22.9	11.1	9.9	6.7	119	EWCH9001K
5.51	EWCH140	94,275	43	61.8	10,000	30.8	9.7	12.2	6.7	198	EWCH14001K
7.09	EWCH180	94,275	43	89.0	10,000	53.7	8.3	15.8	21.7	330	EWCH18001K

* Maximum material properties indicated refer to the material to be cut.

** Tool, pump, and hose are all sold separately, and all are required for the system to function.

03-070146018_r1